



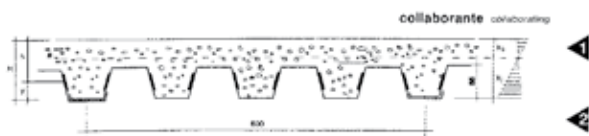

LAMIERE
GRECATE
ZINCATE


LAMIERE GRECATE PER COPERTURA

| Peso Kg/m ² | | Spessore mm | | | |
|------------------------|------|-------------|------|------|-------|
| | | 0,6 | 0,7 | 0,8 | 1 |
| | | 6,42 | 7,49 | 8,57 | 10,72 |
| Peso kg/m ² | 1000 | 4,71 | 5,49 | 6,28 | 7,85 |
| | 1250 | 5,88 | 6,86 | 7,85 | 9,81 |
| | 1500 | 7,06 | 8,24 | 9,42 | 11,77 |

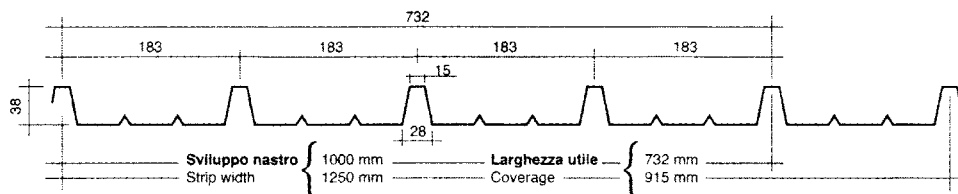

LAMIERE COLLABORANTI


| Spessore | Formato | | | | |
|-----------------------------|---------|-------|-------|-------|-------|
| | 0,6 | 0,7 | 0,8 | 1,0 | 1,2 |
| Peso Kg/m ² | 7,85 | 9,16 | 10,47 | 10,08 | 15,07 |
| 1000 Peso Kg/m ² | 4,71 | 5,49 | 6,28 | 7,85 | 9,42 |
| | 5,88 | 6,86 | 7,85 | 9,81 | 11,77 |
| J cm ⁴ /m | 42,19 | 51,28 | 60,67 | 79,92 | 98,39 |
| W cm ³ /m | 12,2 | 15,15 | 18,28 | 25,01 | 32,19 |

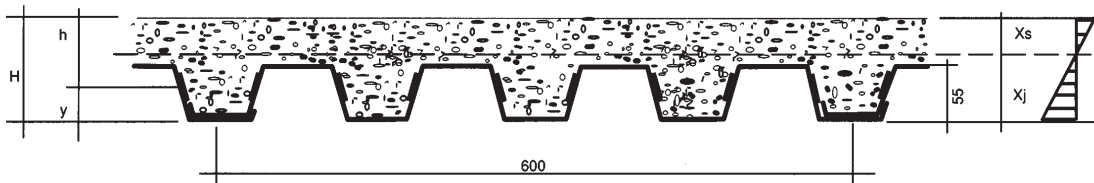

CARATTERISTICHE STATICHE DELLA SOLETTA m = 10

| H cm | peso soletta kg/m ² | spessore lamiera mm | X _S cm | J _{tot} cm ⁴ /m | W _S cm ³ /m | W _i cm ³ /m | T kg/m |
|------|--------------------------------|---------------------|-------------------|-------------------------------------|-----------------------------------|-----------------------------------|--------|
| 9 | 165 | 0,7 | 2,90 | 291 | 1003 | 47,70 | 1030 |
| | | 0,8 | 3,04 | 320 | 1052 | 53,51 | |
| | | 1,0 | 3,28 | 374 | 1140 | 65,38 | |
| | | 1,2 | 3,48 | 423 | 1215 | 76,63 | |
| | | 1,5 | 3,73 | 490 | 1313 | 92,97 | |
| 10 | 165 | 0,7 | 3,18 | 383 | 1204 | 56,15 | 1130 |
| | | 0,8 | 3,33 | 422 | 1267 | 63,26 | |
| | | 1,0 | 3,61 | 493 | 1365 | 77,15 | |
| | | 1,2 | 3,83 | 557 | 1454 | 93,51 | |
| | | 1,5 | 4,12 | 664 | 1563 | 109,52 | |
| 11 | 215 | 0,7 | 3,44 | 493 | 1433 | 65,20 | 1250 |
| | | 0,8 | 3,61 | 543 | 1504 | 73,47 | |
| | | 1,0 | 3,91 | 634 | 1621 | 89,42 | |
| | | 1,2 | 4,17 | 718 | 1721 | 105,12 | |
| | | 1,5 | 4,48 | 830 | 1852 | 127,30 | |
| 12 | 240 | 0,7 | 3,68 | 621 | 1687 | 74,63 | 1360 |
| | | 0,8 | 3,87 | 684 | 1767 | 84,13 | |
| | | 1,0 | 4,21 | 800 | 1900 | 102,69 | |
| | | 1,2 | 4,49 | 905 | 2015 | 120,50 | |
| | | 1,5 | 4,83 | 1047 | 2167 | 146,02 | |



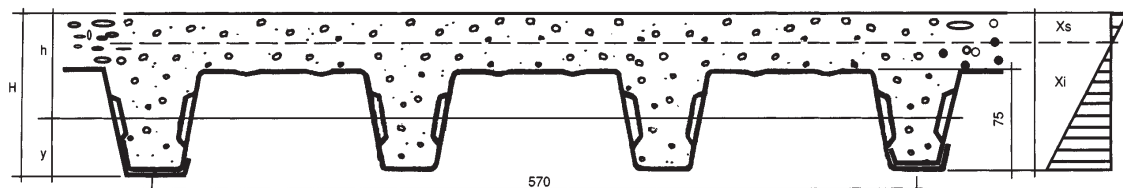

CARATTERISTICHE STATICHE DELLA SOLETTA m = 10

| H cm | peso soletta kg/m ² | spessore lamiera mm | X _S cm | J _{tot} cm ⁴ /m | W _S cm ³ /m | W _i cm ³ /m | T kg/m |
|------|--------------------------------|---------------------|-------------------|-------------------------------------|-----------------------------------|-----------------------------------|--------|
| 12 | 175 | 0,7 | 3,26 | 456 | 1400 | 52,24 | 1420 |
| | | 0,8 | 3,42 | 504 | 1473 | 58,74 | |
| | | 1,0 | 3,69 | 592 | 1606 | 71,31 | |
| | | 1,2 | 3,92 | 674 | 1720 | 83,45 | |
| | | 1,5 | 4,24 | 787 | 1869 | 101 | |
| 13 | 200 | 0,7 | 3,53 | 572 | 1620 | 60,38 | 1535 |
| | | 0,8 | 3,70 | 631 | 1705 | 67,85 | |
| | | 1,0 | 4,01 | 741 | 1848 | 82,44 | |
| | | 1,2 | 4,26 | 842 | 1977 | 96,38 | |
| | | 1,5 | 4,58 | 981 | 2141 | 116,48 | |
| 14 | 225 | 0,7 | 3,78 | 705 | 1866 | 69,02 | 1635 |
| | | 0,8 | 3,97 | 835 | 2103 | 83,23 | |
| | | 1,0 | 4,30 | 914 | 2126 | 94,25 | |
| | | 1,2 | 4,59 | 1039 | 2263 | 110,37 | |
| | | 1,5 | 4,94 | 1208 | 2446 | 133,36 | |
| 15 | 250 | 0,7 | 4,02 | 857 | 2133 | 78,09 | 1765 |
| | | 0,8 | 4,23 | 946 | 2237 | 87,88 | |
| | | 1,0 | 4,59 | 1112 | 2423 | 106,83 | |
| | | 1,2 | 4,90 | 1264 | 2579 | 125,11 | |
| | | 1,5 | 5,28 | 1470 | 2784 | 151,23 | |



CARATTERISTICHE STATICHE DELLA LAMIERA

| Spessore mm | | 0,7 | 0,8 | 1,0 | 1,2 | 1,5 |
|----------------------|--------------------|--------|--------|--------|--------|--------|
| peso | kg/m ² | 9,64 | 11,02 | 13,77 | 16,53 | 20,66 |
| peso | kg/m | 5,49 | 6,28 | 7,85 | 9,42 | 11,77 |
| J _{tot} | cm ⁴ /m | 110,82 | 126,65 | 158,32 | 189,98 | 237,48 |
| J _{ridotto} | cm ⁴ /m | 80,03 | 94,71 | 126,23 | 159,47 | 207,06 |
| W _s | cm ³ /m | 18,98 | 22,96 | 31,79 | 41,66 | 58,13 |
| W _i | cm ³ /m | 21,67 | 25,16 | 32,34 | 39,68 | 50,92 |
| Y | cm | 4,41 | 4,41 | 4,41 | 4,41 | 4,41 |
| A _f | cm ² /m | 12,28 | 14,03 | 17,54 | 21,05 | 26,31 |

DIAMETRI RETE A MAGLIA SALDATA DA 150 X 150 mm

| Spessore mm 0,7 | Altezza soletta cm 1,5 | | | |
|--------------------|--------------------------|-----|-----|-----|
| | Distanza fra gli appoggi | 12 | 13 | 14 |
| < 2,00 m | 3,5 | 3,5 | 3,5 | 4,0 |
| 2,00 : 3,60 m | 4,5 | 4,5 | 4,5 | 4,5 |
| > 3,60 | 5,0 | 5,0 | 5,0 | 5,0 |

10217-7 - 1.4301V.4307 (A)